


Xtralite

Standard rooflights

for flat roof applications

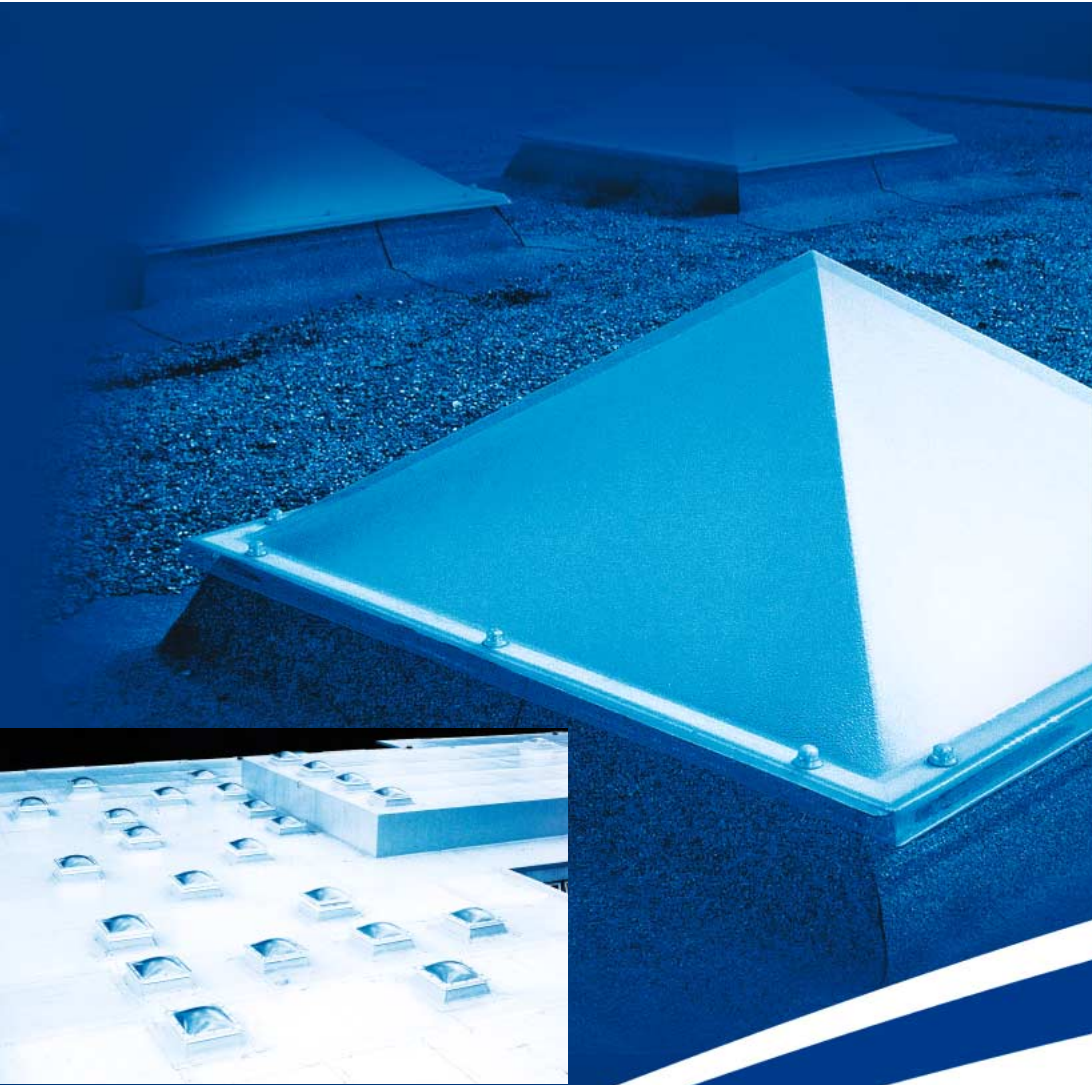

With a huge range of design and material options, our standard rooflight range provides the versatility to match your application precisely.

- Glazing element designs include: domes, pyramids, barrels, hemispheres and northlight wedges
- Polycarbonate, single, double and triple-skin units
- Galvanised steel, aluminium, PVCU and GRP upstands and adaptor kerbs
- Wide range of manual and powered ventilation, extra security and access options



Xtralite
ROOFLIGHTS

Hundreds of options, thousands of con


Our standard rooflight range offers you the versatility of a tailor-made solution, without the additional costs or lead time. Simply select the glazing element, upstand or adaptor kerb and size you require – and leave the rest to us...




Glazing

All Xtralite glazing elements are manufactured in high quality UV protected polycarbonate and are available as single, double and triple-skin units in the following options:


Clear; diffused; bronze anti-glare; opal.
(Other shapes available on request)

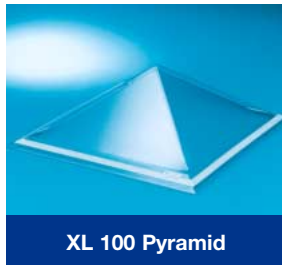

XL 100 Pyramid

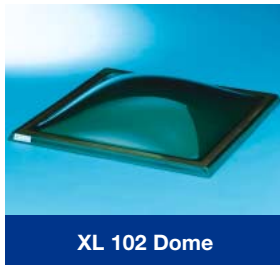

XL 102 Dome

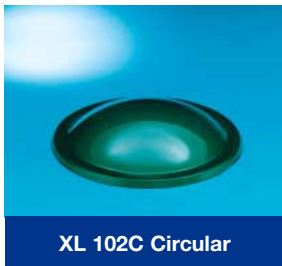


XL 102C Circular



XL 253 Hemispherical



XL 107 Northlight Wedge

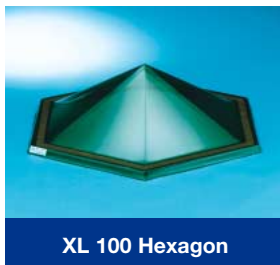

XL 100 Hexagon



XL 101 Barrel Vault



XL 100C Continuous Pyramid

Standard Kerb Range

A huge range of upstands and adaptor kerbs is available, with options for ventilation, insulation, increased security or access.

Materials

PVCU, aluminium, galvanised steel, GRP.

Finishes

Galvanised steel and aluminium with M600 primer as standard with option of white gloss paint or polyester powder coated finishes.

PVCU: High thermal efficiency, white, low maintenance internal finish.

GRP: White, smooth finish internally.

A range of circular upstands are also available in GRP, galvanised steel or aluminium.


Insulation

Supplied as standard on GRP, as an optional extra on galvanised steel and aluminium. PVCU self-insulating.





XL 89 Non-vented Upstand

Available as upstand or adaptor kerb. Variable upstand heights to suit specification. Shown with EML.




XL 89 AK Adaptor Kerb

Adaptor kerbs can be supplied with all ventilation or opening options.

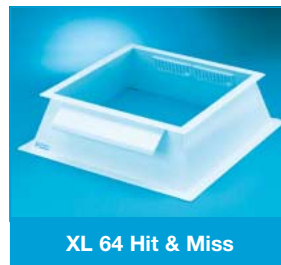


XL 64 Hit & Miss

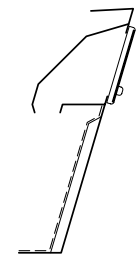

Available as upstand or adaptor kerb. Variable upstand heights to suit specification.



XL 90 AK Controlled Louvre

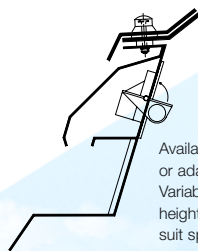


Available as upstand or adaptor kerb. Variable upstand heights to suit specification.

Configurations – to match your application precisely



XL 53 Permanent Ventilation

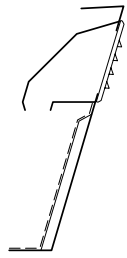

Available as upstand or adaptor kerb. Variable upstand heights to suit specification.



XL 55 50% Ventilation


Available as upstand or adaptor kerb. Variable upstand heights to suit specification.



XL 129 Pole Operated Wormgear



Available as upstand or adaptor kerb. Variable upstand heights to suit specification.

Shown here with upstand.

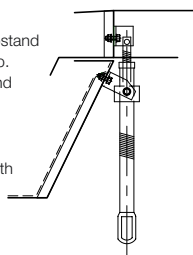



XL 89 VS Vandal Safe

Available as upstand or adaptor kerb. Variable upstand heights to suit specification.

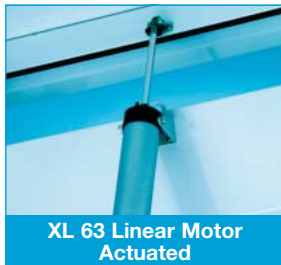


XL 63 Linear Motor Actuated

Available as upstand or adaptor kerb. Variable upstand heights to suit specification.

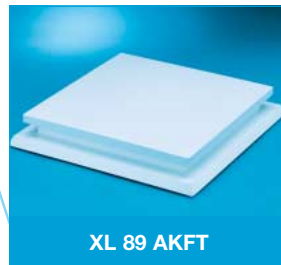


XL 89 AKFT

Available as upstand or adaptor kerb. Variable upstand heights to suit specification.




XL 123 Hinged Access

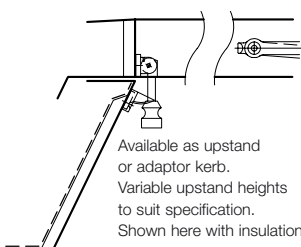

Available as upstand or adaptor kerb. Variable upstand heights to suit specification. Shown here with insulation.



XL 91 Failsafe

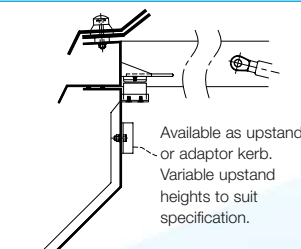


Available as upstand or adaptor kerb. Variable upstand heights to suit specification.



XL 102 with Power Fan

Available as upstand or adaptor kerb. Variable upstand heights to suit specification.



XL 66 Power Fan

Available as upstand or adaptor kerb. Variable upstand heights to suit specification.



Standard Glazing Size

Overall Rooflight Size	Finished Kerb Dimension including waterproofing
Square	
600 x 600	580 x 580
750 x 750	730 x 730
900 x 900	880 x 880
1000 x 1000	980 x 980
1050 x 1050	1030 x 1030
1200 x 1200	1180 x 1180
1350 x 1350	1330 x 1330
1500 x 1500	1480 x 1480
1800 x 1800	1780 x 1780
Rectangular	
600 x 900	580 x 880
600 x 1200	580 x 1180
600 x 1500	580 x 1480
600 x 1800	580 x 1780
600 x 2400	580 x 2380
900 x 1200	880 x 1180
900 x 1350	880 x 1330
900 x 1500	880 x 1480
900 x 1800	880 x 1780
900 x 2400	880 x 2380
1000 x 1500	980 x 1480
1000 x 2000	980 x 1980
1200 x 1500	1180 x 1480
1200 x 1800	1180 x 1780
1200 x 2400	1180 x 2380
1800 x 2400	1800 x 2380

Overall Rooflight Size	Finished Kerb Dimension including waterproofing
Circular (diameter)	
600	580
900	880
1200	1180
1500	1480
1800	1780
Continuous (width)	
600	580
900	880
1200	1180
1500	1480
1800	1780
2100	2080
2400	2380


All Xtralite upstands and adapter kerbs are made to measure.

Please see Xtralite measuring guide for further information.

Xtralite in action...

With such a huge range of designs and options to choose from, Xtralite can provide the appropriate rooflighting solution whatever your application. And there's more to Xtralite than simply utilising natural light.

Xtralite products can provide multi-function versatility such as ventilators, access hatches and fire safety systems. Here are just a few examples of Xtralite products in action...

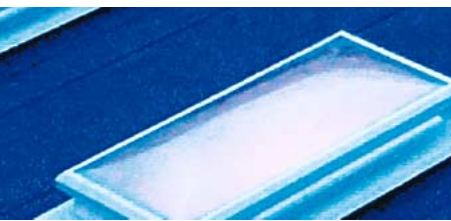

Large area coverage

Where large area coverage is required, a matrix of supporting gutter profiles can be purpose-built to virtually any shape or size.

Continuous rooflights

Available in pyramid, dome asymmetric, north light wedge, trapezoid and hemispherical with a unique system of interlocking glazing elements to form a continuous run of rooflights, up to a maximum width of 1800mm.



- 20 Year insurance protected product guarantee
- Nationwide sales team and technical support
- Bespoke manufacturing with short lead time
- Building Regulations Part L compliant range
- BBA Certified
- Project management

Guarantee

As with all our products, standard rooflights carry a twenty year product guarantee* which is independently protected by insurance. A Guarantee Certificate will be issued on completion of project. More information available upon request.

*subject to policy terms and conditions.

Important

Xtralite have a policy of continually upgrading their products and reserve the right to alter specifications accordingly.

All Xtralite products meet stringent quality procedures.

Responsibility for ensuring any building component/s comply with Building Regulations rests solely with the client or specifier.

Information contained within this brochure is to the best of our knowledge entirely accurate at the time of going to press.



XTRALITE
(Rooflights) Limited
Blyth Industrial Estate
Spencer Road
Blyth
Northumberland
NE24 5TG

Tel: (01670) 354157
Fax: (01670) 364875
E-mail: sales@xtralite.co.uk
Web: www.xtralite.co.uk

